


Dual-band high-performance Gigabit wireless access point

AP605C-AX

Quick Overview

AIR-AP605C-AX is a dual-band high-performance gigabit wireless access point device based on the 802.11ax standard launched by AirPro, it could offer maximum 1775Mbps access rate. AIR-AP605C works in the 2.4GHz and 5GHz frequency bands and supports advanced wireless technologies such as MU-MIMO, OFDMA, spatial multiplexing, and TWT. The first radio of AP605C works in the 2.4GHz frequency band and can provide a maximum access rate of 575Mbps; the second radio works in the 5GHz frequency band and can provide a maximum access rate of up to 1200Mbps.

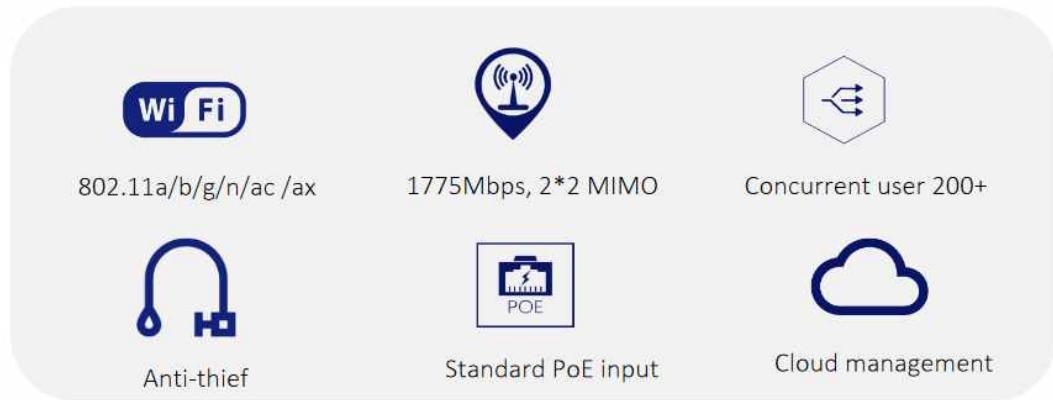

Features

Enterprise-class indoor 802.11ax Wi-Fi 6 wireless access point:-

AIR-AP605C-AX supports the 802.11ax standard, operates in both 2.4 GHz and 5 GHz band, and provides an access bandwidth up to 1775 Mbps. This model is the best choice for Entry-level office or company as it can support concurrent users up to 254.

Wireless user management at a fine granularity:-

AIR-AP605C-AX can support a maximum of 32 WLANs to implement multi-layer multi-service management of wireless users at a fine granularity. Each WLAN supports access control and uplink/downlink rate limit based on MAC or IP addresses. These WLANs may be bound to virtual local area networks (VLANs).

Flexible installation:-

AIR-AP605C-AX supports wall mounting, ceiling mounting, T-keel mounting, you can deploy it almost everywhere that you want.

PoE compatibility:-

AIR-AP605C-AX can work well with all PoE switch (AirPro, Cisco, Huawei, Juniper, etc.) which support 802.3af & at standard, this allows to power up AIR-AP605C-AX directly, a power adapter is not required anymore.

Dual-mode fit & fat:-

AIR-AP605C-AX can work in fit or fat mode and can flexibly switch between the fit mode and the fat mode according to network planning requirements.

TECHNICAL SPECIFICATIONS

Hardware Features		
Dimensions(L*W*D) (mm)	247 x 153 x 30	
10/100 /1000Base-T port	2	
Console port (RJ-45)	1	
USB 2.0	1	
Power supply	802.3af & at and External power adapter (Input: 100~240V AC , Output: 12 VDC)	
Maximum power consumption	<13W	
RF port	Built-in 2.4 GHz 5 dBi antenna and 5 GHz 5 dBi antenna	
Working frequency band	802.11b/g/n/ax: 2.4 GHz to 2.483 GHz 802.11ac/ax: 5.150GHz to 5.250GHz 5.250GHz to 5.350GHz 5.725GHz to 5.850GHz	
Modulation technology	11b : DSS: CCK@5.5/11Mbps, DQPSK@2Mbps, DBPSK@1Mbps 11a/g : OFDM:64QAM@48/54Mbps,16QAM@24Mbps, QPSK@12/18Mbps, BPSK@6/9Mbps 11n : MIMO-OFDM: BPSK, QPSK,16QAM,64QAM 11ac : MIMO-OFDM: BPSK, QPSK,16QAM,64QAM,256QAM 11ax: MIMO-OFDMA: BPSK, QPSK,16QAM,64QAM,256QAM,1024QAM	
Transmit power	2.4G: 23dBm (Per Chain) 5G : 23dBm (Per Chain) (Note : final output power comply with deployment regulation might be different)	
Power adjustment granularity	1 dBm	
Working/Storage temperature	-10°C to +55°C -40°C to +70°C	
Working/Storage RH	5% to 95% (non-condensing)	
Protection level	IP41	
WLAN	Product positioning	Indoor dual-frequency
	Working frequency band	2.4GHz and 5GHz
	Bandwidth performance	1775Mbps
	Virtual AP (BSSID)	32
	Concurrent user	254
	Number of spatial streams	2.4GHz:2, 5GHz:2
	Dynamic channel adjustment (DCA)	Yes
	Transmit power control (TPC)	Yes
	Blind area detection and repair	Yes
	SSID hiding	Yes
	RTS/CTS	Yes
	RF environment scanning	Yes
	Hybrid access	Yes
	Restriction on the number of access users	Yes
	Link integrity check	Yes
	Accessing control of terminals based on signal strength	Yes
	Forcing terminals to roam based on signal strength	Yes
802.11ax enhancements	Intelligent control of terminals based on airtime fairness	Yes
	High-density application optimization	Yes
	Space streams	2.4GHz:2, 5GHz:2
	Frequency band	2.4GHz + 5GHz
	80 MHz bundling	Yes
	1200Mbps (PHY)	Yes
	Frame aggregation (A-MPDU)	Yes
	Frame aggregation (A-MSDU)	Yes
	Maximum likelihood demodulation (MLD)	Yes

TECHNICAL SPECIFICATIONS

HARDWARE FEATURES

HARDWARE FEATURES		
Security	Encryption	64/128 WEP, TKIP, and CCMP encryption
	802.11i	Yes
	Portal authentication	Yes
	WAPI	Yes
	MAC address authentication	Yes
	LDAP authentication	Yes
	PEAP authentication	Yes
	WIDS/WIPS	Yes
	Protection against DoS attacks	Anti-DoS for wireless management packets
	Forwarding security	Frame filtering, white list, static blacklist, and dynamic blacklist
802.11W	User isolation	AP L2 forwarding suppression
	Periodic SSID enabling and disabling	Isolation between client
	Access control of free resources	Yes
	Wireless SAVI	Yes
	ACL	Access control of various data packets such as MAC, IPv4, and IPv6 packets
	Secure access control of APs	Secure access control of APs, such as MAC authentication, password authentication, or digital certificate authentication between an AP and an AC
		Yes, encryption of management frames
Forwarding	IP address setting	Static IP address configuration or dynamic DHCP address allocation
	IPv6 forwarding	Yes
	IPv6 portal	Yes
	Local forwarding	Yes
	Multicast	IGMP snooping
	Roaming	Yes
	AP switching reference	Signal strength, bit error rate, RSSI, S/N, whether neighboring APs are normally operating, etc.
QoS	WDS	Yes
	WMM	Yes
	Priority mapping	Ethernet port 802.1P identification and marking
	QoS policy mapping	Mapping from wireless priorities to wired priorities
		Mapping of different SSIDs/VLANs to different QoS policies
		Mapping of data streams that match with different packet fields to different QoS policies
	L2-L4 packet filtering and flow classification	Yes: MAC, IPv4, and IPv6 packets
	Load balancing	Load balancing based on the number of users
	Bandwidth limit	Load balancing based on user traffic
		Load balancing based on frequency bands
Intelligent identification of terminals	Bandwidth limit	Bandwidth limit based on APs
		Bandwidth limit based on SSIDs
		Bandwidth limit based on terminals
		Bandwidth limit based on specific data streams
	Call admission control (CAC)	CAC based on the number of users
Multicast enhancement	Power saving mode	Yes
	Automatic emergency mechanism of APs	Yes
	Intelligent identification of terminals	Yes
	Multicast enhancement	Multicast to unicast

TECHNICAL SPECIFICATIONS

HARDWARE FEATURES

HARDWARE FEATURES	
Management	<p>Network management</p> <p>Maintenance mode</p> <p>Log function</p> <p>Alarm</p> <p>Fault detection</p> <p>Statistics</p> <p>Switching between the fat and fit modes</p> <p>Remote probe analysis</p> <p>Watchdog</p>
Value added service	<p>Value added marketing</p> <p>Value added authentication</p> <p>Passenger flow analysis</p>

AIR-AP605C-AX is ideal AP for indoor Wi-Fi coverage, with zero touch provisioning, advanced RF control and cost-effective design, it could offer best indoor Wi-Fi experience for customers.



www.airpro.in

All specifications in this document are subject to change without notice. AirPro products are sold with a limited warranty described at: www.airpro.in
Copyright 2016, AirPro. All rights reserved.